

(12) UK Patent Application (19) GB (11) 2 367 213 (13) A

(43) Date of A Publication 27.03.2002

(21) Application No 0023270.2

(22) Date of Filing 22.09.2000

(71) Applicant(s)
Roke Manor Research Limited
(Incorporated in the United Kingdom)
Roke Manor, ROMSEY, Hampshire, SO51 0ZN,
United Kingdom

(72) Inventor(s)
Stephen McCann
Robert Hancock
John May
Michael Hook

(74) Agent and/or Address for Service
Andrew Neill
Siemens Shared Services Limited, Intellectual
Property Department, Siemens House, Oldbury,
BRACKNELL, Berkshire, RG12 8FZ, United Kingdom

(51) INT CL⁷
H04L 12/28, H04Q 7/38

(52) UK CL (Edition T)
H4L LRAB L205

(56) Documents Cited
GB 2350975 A GB 2350970 A
GB 2342816 A WO 00/67446 A1

(58) Field of Search
UK CL (Edition S) H4L LDGR LRAB LRAD LRCMA
INT CL⁷ H04L 12/28, H04Q 7/38
ONLINE: WPI, EPODOC, JAPIO, INSPEC

(54) Abstract Title
Access authentication system

(57) An access authentication system is provided for authenticating access for visitors to a wireless local area network (W-LAN), the operator of which administers a visitor authentication, authorisation and accounting (VAAA) server. A user requesting visiting access to the W-LAN, is required to have a valid cellular mobile account, a portable computing device with a browser and a valid W-LAN card from another operator that administers a home authentication, authorisation and accounting (HAAA) server. The user, on requesting visiting access to the W-LAN, inputs, via the VAAA server, identity information that enables the HAAA to issue a personal identification number (PIN) which is encoded and forwarded, preferably by way of a short message service (SMS), to the user's mobile telephone. This encoded PIN is transferred to the browser to authenticate the requested visiting access to the W-LAN, and the costs associated with such access are billed to the user's cellular mobile account; the requested access being achieved via the user's browser. The user may employ the browser to convey the identity information, via the W-LAN, to the VAAA. Alternatively, the user may call the VAAA on the mobile telephone to provide said identity information, in which case, the subject telephone call is preferably forwarded to the HAAA via a premium rate call unit.

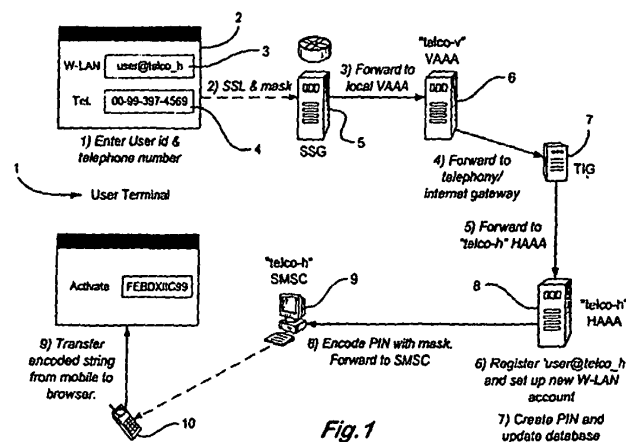


Fig. 1

At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.

GB 2 367 213 A


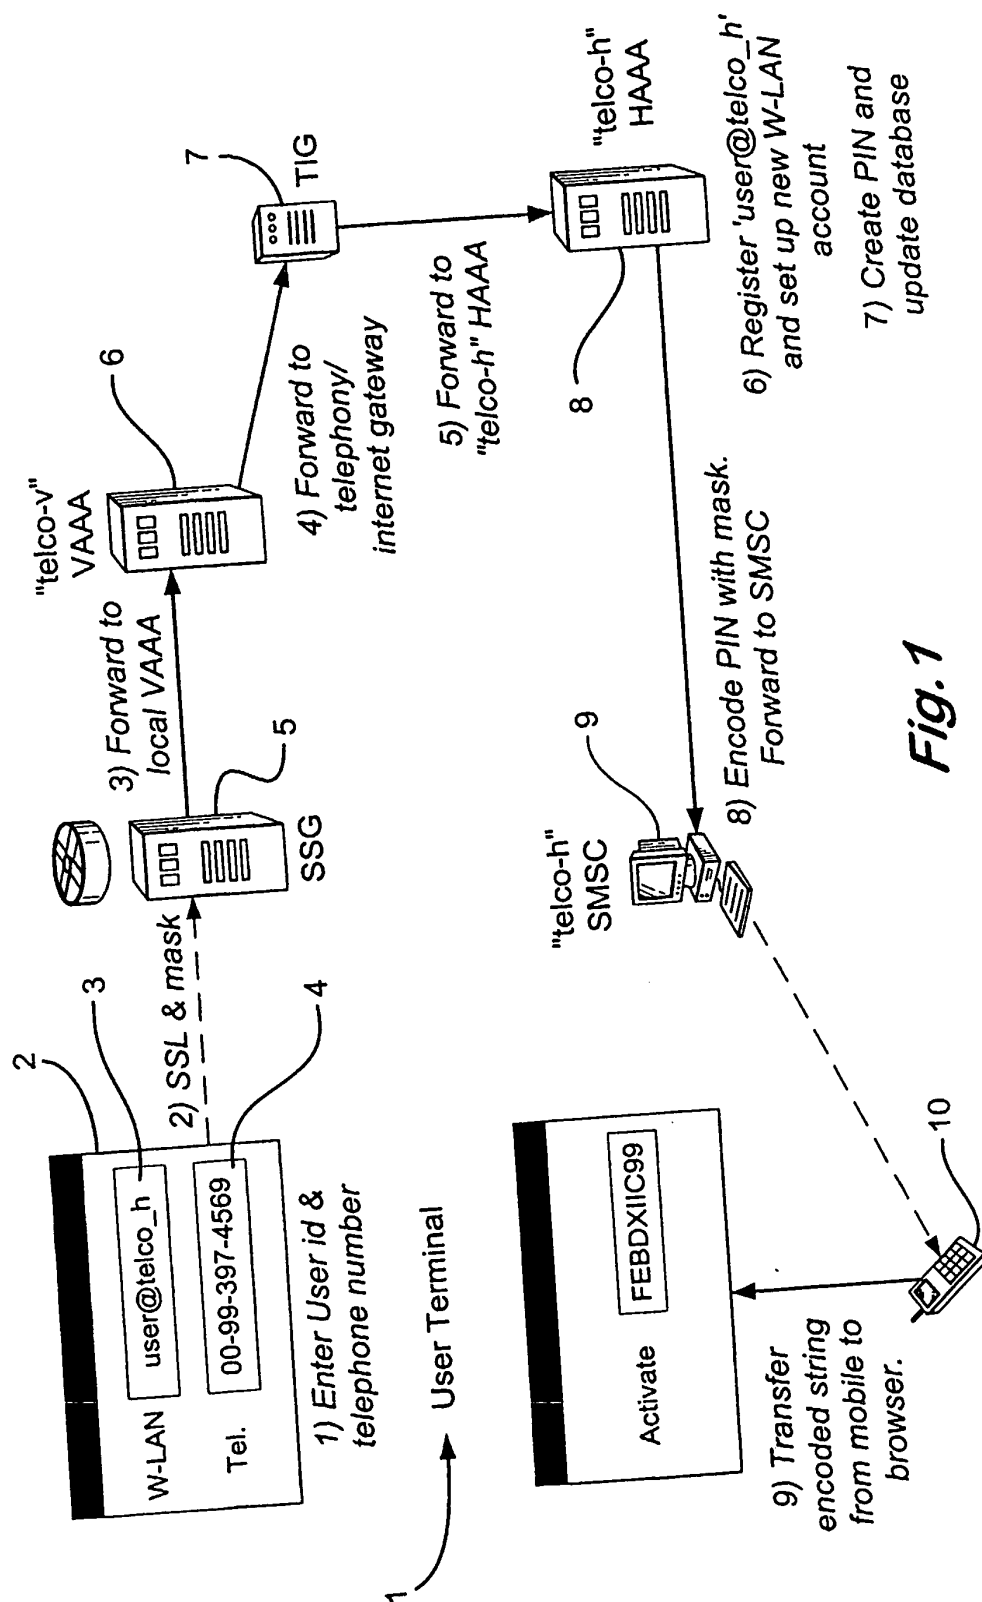


Fig. 1

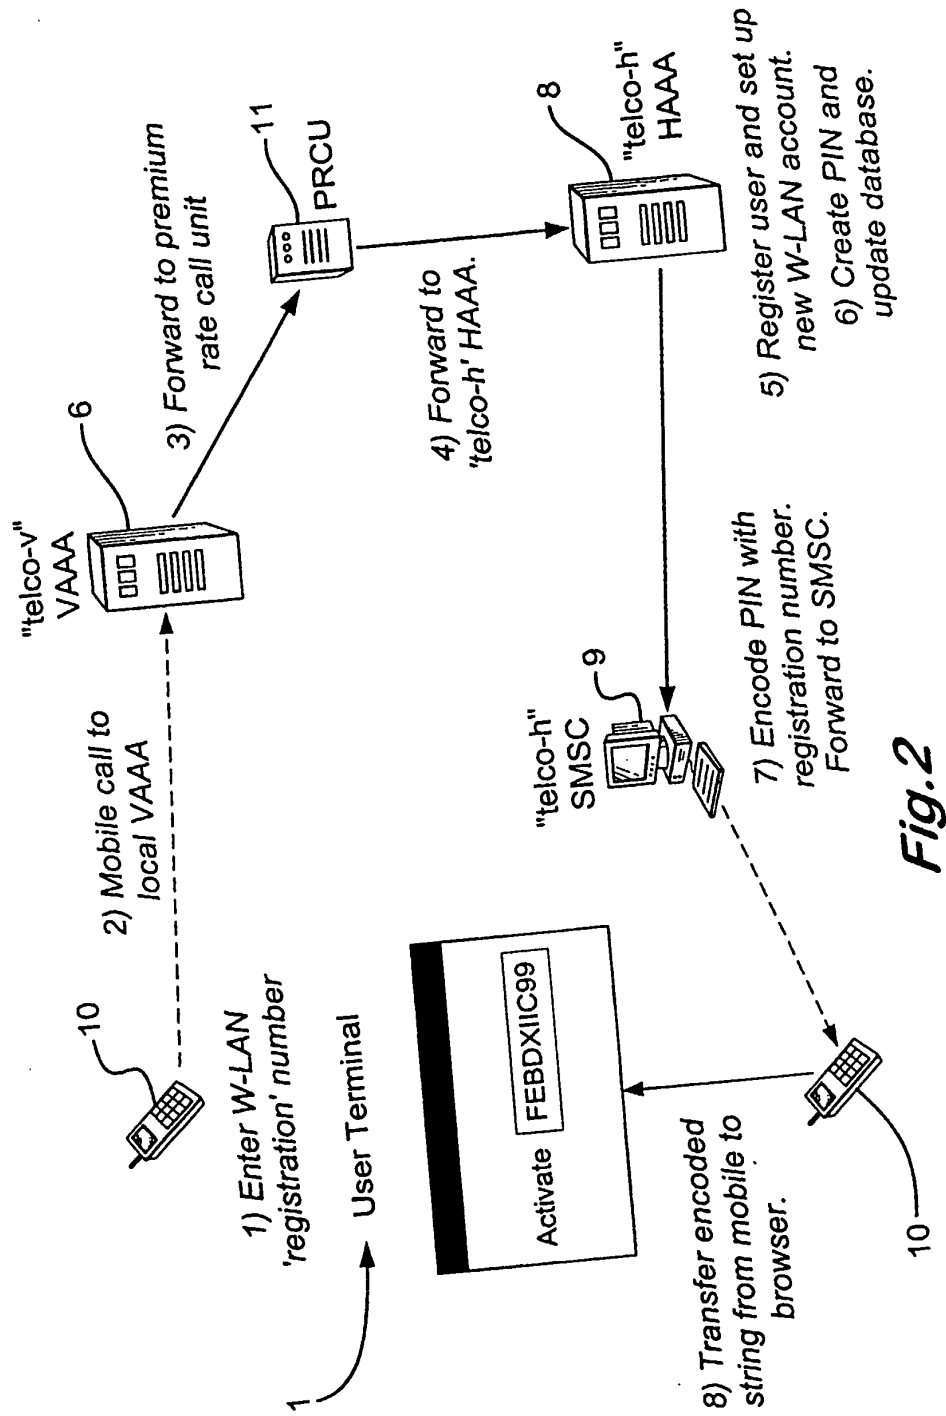

ACCESS AUTHENTICATION SYSTEM

This invention relates to access authentication systems for Wireless
Local Area Networks (W-LANs), and it relates especially to such systems
5 as can cope with the problems of user-mobility between W-LANs.

In W-LAN systems, it is often the case that a user, subscribing with
one network operator (hereinafter called "the Home Operator" for that
user), wishes to connect, as a "visitor", to one or more other W-LAN sites.
The operator of the visited W-LAN site, however, needs to be convinced
10 of the bona fides and credit worthiness of the visitor before permitting
access to the W-LAN system and/or before supplying the visitor with
certain services or information. Our previous patent application No.
(GB0022604.3; Internal No. 2000P04883GB) envisages the visiting user
basing its connection to the visited W-LAN, for charging and other
15 operational purposes, on that user's subscription with its Home Operator.
This arrangement permits a visiting user, once authenticated as a visitor
with regard to a particular LAN, to revisit that LAN for as long as the
appropriate user authentication with the Home Operator remains sound,
without further user intervention.

This represents a significant step forward in user convenience and is achieved by virtue of the operator of each W-LAN administering home (H) network and Visitor (V) network authentication, authorisation and accounting (AAA) servers, which communicate with one another regarding
5 the subscriber's identity and other relevant operational/charging criteria. Thus, the VAAA automatically communicates with the HAAA to derive the necessary authorisation and to organise the necessary charging, etc.

In general, however, the authentication of a new (unknown) user wishing to connect to a W-LAN system is difficult and requires the use of
10 a third party or some direct physical communication. Even activation of a new feature of an existing subscription may require contact with the customer care department of an operator, which is an expensive and error-prone procedure. However such authentication is achieved, it ultimately becomes a question of trust, which limits current public space W-LAN
15 operations to providing open access only.

This invention aims to reduce the problems of authentication, thus permitting a wider range of services to be provided to users, including visiting users, without compromising either the security of the networks or the ability of the network operators to ensure that they receive due
20 payment for their services.

According to the invention there is provided an access authentication system for authenticating access to a first wireless local area network (W-LAN), the operator of which administers a visitor authentication, authorisation and accounting (VAAA) server, wherein a

5 user requesting visiting access to the first W-LAN, and having a valid cellular mobile account, a portable computing device with a browser and a registration with a second W-LAN operator that administers a home authentication, authorisation and accounting (HAAA) server, conveys to the VAAA server, by user intervention, identity information sufficient to

10 enable said VAAA server to communicate with said HAAA server so as to authenticate the proposed connection; said HAAA issuing a personal identification number (PIN) which is encoded and forwarded to the user's mobile telephone and transferred to the browser to authenticate the requested visiting access to the W-LAN; the cost of such access being

15 billed to the user's cellular mobile account and the requested access being achieved via the user's browser.

By this means, the existence of the user's mobile cellular account is used by the system to provide the necessary verification of the user's identity thus encouraging the W-LAN operator to provide, for example,

20 extra secure services to that user. The SIM card that the mobile user must

carry to operate the cellular mobile instrument thus acts as a certificate of trust between the mobile user and the network operator. Successful receipt by the user of a short message via the GSM or other short message service (SMS) addressed to the SIM is utilised to prove ownership of the SIM
5 card, and hence identity of the user, without requiring a third party or manual intervention by the operator.

Preferably, the transfer of the PIN to the browser is effected manually by the user. Alternatively, however, it may be achieved automatically by means of software on the portable computer if this is
10 connected to the mobile telephone. Such transfer can be effected remotely, for example by infra-red or Bluetooth, or directly by means of a cable connection.

Preferably, the PIN issued by the HAAA is encoded and forwarded to the user's mobile telephone by means of an SMS centre.

15 Preferably, in accordance with one aspect of the invention, the user employs the browser to convey said identity information (which may include or consist solely of a telephone number), via the first W-LAN, to the VAAA. This enables the user to set up a desired W-LAN log-on identity, and for this to be incorporated, together with the user's cellular
20 telephone number, into the PIN. Preferably also, the PIN is combined with

masking information, and it is further preferred that the masking information is randomly derived.

Preferably, in accordance with a second aspect of the invention, the user calls the VAAA on the mobile telephone to provide said identity information. In this case, the subject telephone call may be routed to the HAAA through a premium rate call unit.

In order that the invention may be clearly understood and readily carried into effect, certain embodiments thereof will now be described, by way of example only, with reference to the accompanying drawings, of which:

Figure 1 shows, in schematic form, the operation of a system in accordance with one embodiment of the invention; and

Figure 2 shows, in similar form, the operation of a system in accordance with a second embodiment of the invention.

Referring now to Figure 1, there is shown schematically the operation of a system in accordance with one example of the invention; it being assumed at the outset that a visiting user wishing to connect to a WLAN has a valid cellular mobile account, a portable device, such as a WAP

telephone or a UMTS terminal, with appropriate computing capability,
having a suitable W-LAN interface and HTTP-compliant browser.

Upon entering the W-LAN, indicated generally at 1, an introductory
web page 2 is displayed on the browser of the portable device. This page 2
5 requests (at 3) insertion of a desired W-LAN identity, selected by the user,
together with that of the home network operator (telco-h) with whom that
user subscribes, and (at 4) the user's cellular telephone number. Instead of
the user's cellular number, any other information sufficient to identify the
user's cell phone account could be used.

10 The entered information is combined with a randomly derived
masking data string and sent across the W-LAN to a local service selection
gateway (SSG) 5 using a secure communication protocol, such as may be
incorporated into the browser of the portable device.

The SSG 5 forwards the transmitted information to the local visitor
15 AAA unit 6 owned by the operator, "telco-v" of the visited W-LAN, and
thence to a telephony/Internet gateway 7 which utilises the information it
receives to identify the mobile user's home AAA and sends the
information to the home AAA, 8, which is operated of course by the user's
home network operator, telco-h.

Telco-h establishes a W-LAN account for the user, which account is billed to the user's existing cellular account, although the subject charges are preferably made the subject of a separate entry list under the account so that they can be readily identified. In addition, at this stage, the home

5 AAA, 8, generates a PIN, which is then encoded with the original masking data string and passed to a local short message service centre (SMSC), 9. The cellular mobile system then relays the message to the appropriate location, where it is received at the handset 10 of the mobile user, who manually transfers the encoded string from the message into the portable

10 device, thus validating the W-LAN account creation process. Alternatively, the encoded string may be transferred automatically subject to the provision of a suitable data connection.

The above transaction can alternatively be achieved, if desired, by means including an infra-red (IR) link, short range wireless access device

15 or by means of an extended cellular receiver unit embedded within the mobile user's portable device.

It is to be noted that the mobile user does not need to know individually the masking string and the PIN allocated by telco-h, only their combination.

If necessary, access for the mobile user to all or selected services on the visited W-LAN may be barred once the true identity of the home AAA 8 has been identified if, for example, it turns out to be a hostile regime, to be a bogus entry or to have a zero credit rating.

5 The operation of an alternative system, in accordance with a second embodiment of the invention, will now be described with reference to Figure 2.

In this alternative system, a registration number is freely given to the visiting mobile user at entry to the W-LAN. The registration number may, 10 for example, be displayed on a poster or a screen, or contained on a freely distributed leaflet or in a web page set up to act as a default page for unregistered users of the W-LAN.

The user's cellular mobile device is employed to contact a premium rate service and then enter the (public) registration number, which will 15 then register the user with the W-LAN in a similar manner to that described above with respect to Figure 1. Once the call is completed, the mobile user receives an SMS message, as described above, so completing the authentication process. In this case, the content of the message may be time-stamped and linked to the local access point and user identity, to 20 prevent re-use or sharing of access.

Referring now specifically to Figure 2, in which components identical with or functionally equivalent to those shown in Figure 1 carry the same reference numbers, the user rings a premium rate number, using the mobile device 10, entering the public registration number to register with the W-LAN. The local visitor AAA, 6, routes this call to a premium rate call unit 11 which then sends the information to the home AAA, 8. The operator telco-h which owns this home AAA then establishes a W-LAN account for the user, billed, as before, to the existing cellular account for the mobile device 10.

10 A PIN is generated from this initialisation which is then encoded with the registration number sent from the user and passed to the local SMSC, 9. The cellular mobile system then relays the message to the appropriate location, where it is received by the mobile user on the handset, 10.

15 The user is then required to manually transfer the encoded data string (i.e. the string comprising the PIN encoded with the registration number) into the portable device with computing capability, thereby validating the WLAN account creation process.

As before, this transaction can alternatively be achieved by means of an infra-red link, short range wireless access or an embedded cellular receiver unit inside the mobile user's portable device.

The web page is used to provide the data string to the LAN, to
5 authenticate the access and then start encryption since it can then easily be user-specific, without the user needing to provide, for example, a MAC address.

It will be appreciated that the system of Figure 2 is purely telephony network based. Advantageously, the network operator (telco-v) does not
10 need to have web-based forms up and running to operate the system of Figure 2. Moreover, the system of Figure 2 generates revenue (or pre-payment revenue) via the premium access phone call, thus decoupling billing functionality from the W-LAN itself. This revenue can be automatically shared between the premium rate service provider and the
15 W-LAN operator.

Although the invention has been described with regard to particular embodiments thereof, it is not intended that the scope of the claims of this application be limited to those embodiments, and alternative arrangements will be evident in many respects to those skilled in the art.

CLAIMS:

1. An access authentication system for authenticating access to a first
wireless local area network (W-LAN), the operator of which
5 administers a visitor authentication, authorisation and accounting
(VAAA) server, wherein a user requesting visiting access to the first
W-LAN, and having a valid cellular mobile account, a portable
computing device with a browser and a registration with a second
W-LAN operator that administers a home authentication,
10 authorisation and accounting (HAAA) server, conveys to the VAAA
server, by user intervention, identity information sufficient to enable
said VAAA server to communicate with said HAAA server so as to
authenticate the proposed connection; said HAAA issuing a personal
identification number (PIN) which is encoded and forwarded to the
15 user's mobile telephone and transferred to the browser to
authenticate the requested visiting access to the W-LAN; the cost of
such access being billed to the user's cellular mobile account and the
requested access being achieved via the user's browser.

2. A system according to Claim 1 wherein the transfer of the PIN to the browser is effected manually by the user.
3. A system according to Claim 1 wherein the portable computing
5 device is coupled to the mobile telephone and the transfer of the PIN to the browser is effected automatically by means including software supported by the portable computing device.
4. A system according any preceding claim, wherein the PIN issued by
10 the HAAA is encoded and forwarded to the user's mobile telephone by means of a short message service centre.
5. A system according to any preceding claim, wherein the user employs the browser to convey said identity information, via the
15 first W-LAN, to the VAAA.
6. A system according to any preceding claim wherein the PIN is combined with masking information.

7. A system according to Claim 6 wherein said masking information is randomly derived.
8. A system according to any of claims 1 to 4 inclusive, wherein the user calls the VAAA on the mobile telephone.
9. A system according to Claim 8 wherein the telephone call from said user is routed to the HAAA through a premium rate call unit.
10. An access authentication system substantially as herein described with reference to and/or as shown in the accompanying drawings.



Application No: GB 0023270.2
Claims searched: 1-6

14
—

Examiner: Robert Shorthouse
Date of search: 15 June 2001

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.S): H4L (LDGR, LRCMA, LRAB, LRAD)

Int Cl (Ed.7): H04L 12/28, H04Q 7/38

Other: Online: WPI, EPODOC, JAPIO, INSPEC

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A, E	GB 2350970 A (NOKIA) See abstract	-
A, E	GB 2350975 A (ERICSSON) See abstract	-
A	GB 2342816 A (ERICSSON) See abstract	-
A, E	WO 00/67446 A1 (NOKIA) See abstract	-

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.